


IES-2216C/E

16 10/100TX + 2 10/100/1000T/Dual Speed SFP Combo w/Pro-Ring Managed Industrial Switch

- DNV Type Approval for Ships, Craft and Off-shore Platforms
- UL Class I Division II for Group A,B,C and D hazardous location
- Pro-ring System: X-ring, Dual Homing, and Couple Ring Topology
- Redundant backup feature and the Ring recovery time below 10ms
- IEEE1588 PTP Client 1~2ms supported**



OVERVIEW

The Lantech IES-2216C/E is a 16-port 10/100BaseTX + 2-port 10/100/1000T/Dual Speed SFP combo SNMP industrial switch. The SFP interface support both 100M and Giga fiber. The Lantech IES-2216C/E redundant power design and Pro-ring features ensure a high-performance and reliable network connection.

The IES-2216C/E supports relay contact to connect with alarm system in case of power or port failure. The wide-range redundant power design, overload current and power polarity reverse protection provide higher stability in power supply.

Lantech features "Pro-Ring" incorporating X-Ring to find an auto-recovery-path in 10ms when Ring network is failed over and can be ring up to 250 Lantech Industrial Switches in a ring. Lantech Dual Homing feature can ensure two X-Ring groups with redundant back up when connected to a backbone switch. The IES-2216C/E can set back-up masters in X-Ring to ensure the most secure network as well.

With UL Class I Division II approval, the IES-2216C/E can be implemented in hazardous or explosive condition without accelerating the damage. The -E model can be used in extreme environments with an operating temperature range of -40°C to 75°C. It is the best solution for inflammable environment where the liquid, gas and vapor etc might present the hazardous condition which generally to be found in mining, oil & gas, chemical, processing automation areas.


Lantech DNV-Type Approval IES-2216C-DNV model meets with the most critical test criteria in DNV Type test directives consisting of MED (Marine Equipment Directive), EMC (Electromagnetic Compatibility Directive) and LVD (Low Voltage Directive) in which vibration, high voltage, compass safe distance, salt mist tests, humidity etc are conducted to ensure the switch sustaining the harsh on-board environments often founded in Ships, Crafts and Offshore platforms

FEATURES & BENEFITS

- **16-port 10/100/1000T + 2 10/100/1000T/Dual Speed SFP Industrial Switch.(Total 18 Port Switch)**
- **8K MAC Address Table / 1Mbits Packet Buffer**
- **RJ-45 Port Support Auto MDI/MDI-X Function**
- **Back-plane (Switching Fabric): 7.2Gbps**
- **IP-30 Protection with DIN rail and Wall-mount design**
- **Overload current and power polarity reverse protection**
- **Wide-range redundant power design**
- **UL Class I Division II for Group A,B,C and D**
- **Pro-Ring**
 - X-ring, Dual Homing, and Couple Ring Topology.
 - Provides redundant backup feature and the recovery time below 10ms for a ring up to 250 switches
- **VLAN: Port Based VLAN, 802.1 Q Tag VLAN, GVRP**
- **IEEE802.1d Spanning Tree & IEEE802.1w RSTP**
- **Double Tag VLAN (Q in Q)** , Private VLAN****
- **Bandwidth Control**
 - Ingress Packet Filter and Egress Rate Limit
 - Broadcast/Multicast Packet Filter Control
- **IGMP with Query mode for Multi Media**
- **QoS (Quality of Service)**
 - Support IEEE 802.1p Class of Service
 - Per port provides 4 priority queues
 - Port Base, Tag Base and Type of Service Priority
- **System Event Log**
 - System Log Server/Client
 - SMTP e-mail Alert
 - Relay Alarm Output System Events
- **Security**
 - Port Security : MAC address entries/filter
 - IP Security: IP address security management to prevent unauthorized intruder.
 - Login Security: IEEE802.1X/RADIUS
- **SNMP Trap**
 - Device cold start, Power status, Authentication failure, X-Ring topology changed, Port Link up/Link down
- **Port Trunk with LACP**
- **Support 802.1ab LLDP**
- **TFTP Firmware Update and System Configure Restore/Backup**

Datasheet Version 1.0

DIMENSIONS (unit=mm)

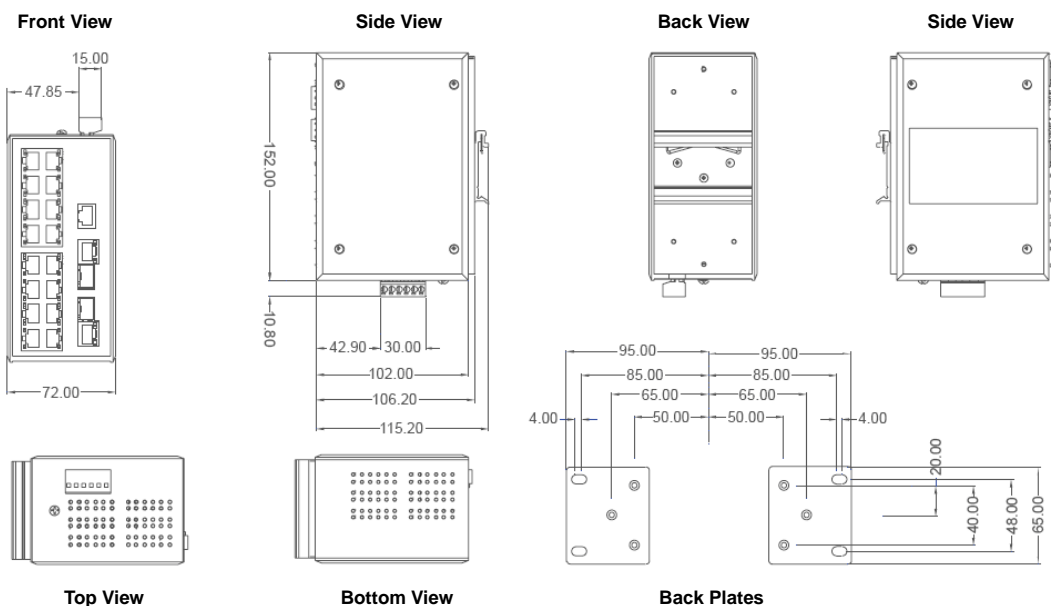

SPECIFICATION

Hardware Specification		Software Specification	
Standards	IEEE 802.3 10Base-T Ethernet IEEE 802.3u 100Base-TX IEEE802.3ab 1000Base-T IEEE802.3z Gigabit fiber IEEE802.3x Flow Control and Back Pressure IEEE802.3ad Port trunk with LACP IEEE802.1d Spanning Tree IEEE802.1w Rapid Spanning Tree IEEE802.1p Class of Service IEEE802.1Q VLAN Tag IEEE 802.1x User Authentication (Radius) IEEE802.1ab LLDP IEEE1588 PTP Precision Time Protocol, 1-2ms**	Protocol	CSMA/CD
Switch Architecture	Back-plane (Switching Fabric): 7.2Gbps	Power Supply	24 VDC (9~56VDC), Redundant power with polarity reverse protect function and removable terminal block
Transfer Rate	14,880pps for Ethernet port 148,800pps for Fast Ethernet port 1,488,000pps for Gigabit Fiber Ethernet port	Power Consumption	10 Watts (Open Issue)
Packet Buffer	1Mbits	Operating Humidity	5% to 95% (Non-condensing)
Mac Address	8K MAC address table	Operating Temperature	-20°C~60°C / -4°F~140°F (Standard model) -40°C~75°C / -40°F~167°F (-E model)
Flash ROM	4Mbytes	Storage Temperature	-40°C~85°C / -40°F~185°F
DRAM	32Mbytes	Case Dimension	Metal case, IP-30, 72mm (W) x 105mm (D) x 152mm (H)
Connectors	10/100TX: 16 x RJ-45 10/100/1000T/ Mini-GBIC Combo: 2 x RJ-45 + 2 x 100/1000 SFP sockets RS-232 connector: RJ-45 type	Weight	1409 g
Network Cable	10Base-T: 2-pair UTP/STP Cat. 3, 4, 5 cable EIA/TIA-568 100-ohm (100m) 100Base-TX: 2-pair UTP/STP Cat. 5/5E cable EIA/TIA-568 100-ohm (100m)	Installation	DIN Rail and Wall Mount Design.
Optical Cable	Multi-mode: 50/125um~62.5/125um Single mode: 9/125um Available distance: 2km (Multi-mode)/30km (Single-mode) Wavelength: 1310nm (Multi-mode/Single-mode)	EMI & EMS	FCC Class A, CE EN61000-4-2 (ESD), CE EN61000-4-3 (RS), CE EN61000-4-4 (EFT), CE EN61000-4-5 (Surge), CE EN61000-4-6 (CS), CE EN61000-4-8, CE EN61000-4-11, CE EN61000-4-12, CE EN61000-6-2, CE EN61000-6-4
LED	Per unit : Power (Green), Power 1 (Green), Power 2 (Green), Fault (Red), Master (Green) 16 10/100TX : Link/Activity (Green), Full duplex/Collision (Yellow) Giga Copper : Link/Activity (Green), Speed (1000Mbps Green) SFP : Link/Activity (Green)	Safety	UL, cUL, CE/EN60950-1 UL Class I Division II for Group A,B,C and D hazardous location
Reserve polarity protection	Present	Stability Testing	IEC60068-2-32 (Free fall), IEC60068-2-27 (Shock), IEC60068-2-6 (Vibration)
Overload current protection	Present	MTBF	220111 hrs
		Warranty	5 years
		Management	SNMP v1 v2c, v3/ Web/Telnet/CLI Management
		IGMP	Supports IGMP snooping v1,v2, v3 256 multicast groups and IGMP query
		VLAN	Port Based VLAN IEEE 802.1Q Tag VLAN (256 entries)/ VLAN ID (Up to 4K, VLAN ID can be assigned from 1 to 4096.) GVRP (256 Groups) Double Tag VLAN (Q in Q)** Private VLAN**

Industrial Managed Switches

SNMP MIB	RFC 1215 Traps MIB, RFC 1213 MIBII, RFC 1157 SNMP MIB, RFC 1493 Bridge MIB, RFC 2674 VLAN MIB, RFC 1643 EtherLike, RFC 1757 RMON, RSTP MIB, Private MIB	Pro-Ring	Supports X-Ring, Dual Homing, and Couple Ring. Provide redundant backup feature and the recovery time below 10ms
Port Trunk with LACP	LACP Port Trunk: 4 Trunk groups/Maximum 4 trunk members	Spanning Tree	Supports IEEE802.1w Rapid Spanning Tree
LLDP	Support LLDP to allow switch to advise its identification and capability on the LAN	Port Mirror	Support 3 mirroring types: "RX, TX and Both packet".
Port Security	Support 100 entries of MAC address for static MAC and another 100 for MAC filter	Quality of Service	The quality of service determined by port, Tag and IPv4 Type of service, IPv4/IPv6 Different Service
IP Security	Supports 10 IP addresses that have permission to access the switch management and to prevent unauthorized intruder	Class of Service	Supports IEEE802.1p class of service, per port provides 4 priority queues
Login Security	Supports IEEE802.1X Authentication/RADIUS	System Log	Supports System log record and remote system log server
SNTP	Supports SNTP to synchronize system clock in Internet	Relay Alarm	Provides one relay output for port breakdown, power fail Alarm Relay current carry ability: 1A @ DC24V
SMTP	Supports SMTP Server and 6 e-mail accounts for receiving event alert	SNMP Trap	Up to 3 Trap stations Cold start, Port link up, Port link down, Authentication Failure, Private Trap for power status, Port Alarm configuration, Fault alarm, X-Ring topology change
Bandwidth Control	Supports ingress packet filter and egress packet limit The egress rate control supports all of packet type and the limit rates are 100K-250Mbps Ingress filter packet type combination rules are Broadcast/Multicast/Unknown Unicast packet, Broadcast/Multicast packet, Broadcast packet only and all of packet. The packet filter rate can be set from 100k to 250Mbps	DHCP	Provides DHCP Client/ DHCP Server functions
Flow Control	Supports Flow Control for Full-duplex and Back Pressure for Half-duplex	DNS	Provides DNS client feature and support Primary and Secondary DNS server
		Firmware Update	Supports TFTP firmware update, TFTP backup and restore.
		Configuration upload and download	Supports binary configuration file for system quick installation

*Future Release
**Optional

ORDERING INFORMATION

- **IES-2216C.....P/N: 8350-650**
16 10/100TX + 2 10/100/1000T/Dual Speed SFP Combo w/Pro-Ring managed Industrial Switch; -20 to 60°C
- **IES-2216C-E.....P/N: 8350-655**
16 10/100TX + 2 10/100/1000T/Dual Speed SFP Combo w/Pro-Ring managed Industrial Switch; -40 to 75°C
- **IES-2216C-DNV.....P/N: 8350-650DNV**
16 10/100TX + 2 10/100/1000T/Dual Speed SFP Combo w/Pro-Ring managed Industrial Switch; -20 to 60°C; DNV Approval

OPTIONAL ACCESSORIES

DIN Rail Power

- **AD1048-24FS** 24VDC, 2A, Wide AC Input, Convection Cooled, DIN Rail or Wall Mounted, RoHS, Operating Temp. -20°C~50°C
- **AD1024-24F** 24VDC, 1A, Wide AC Input, Convection Cooled, DIN Rail or Wall Mounted, RoHS, Operating Temp. -20°C~50°C
- **AD1240-48S** 48VDC, 5A, Wide AC Input, Build-in fan Cooled, DIN Rail or Wall Mounted, RoHS, Operating Temp. -20°C~50°C
- **AD1120-48F** 48VDC, 2.5A, Wide AC Input, Build-in fan Cooled, DIN Rail or Wall Mounted, RoHS, Operating Temp. -20°C~50°C

Mini GBIC (SFP)

- | | |
|--|--|
| ■ 8330-162 MINI GBIC 1000SX (LC/0.5km) Transceiver | ■ 8330-188 LTSFP-1000BX-10KM Transceiver (WDM 1310) |
| ■ 8330-163 MINI GBIC 1000SX2 (LC/2km) Transceiver | ■ 8330-189 LTSFP-1000BX-10KM Transceiver (WDM 1550) |
| ■ 8330-165 MINI GBIC 1000LX (LC/10km) Transceiver | ■ 8330-186 LTSFP-1000BX-20KM Transceiver (WDM 1310) |
| ■ 8330-166 MINI GBIC 1000LHX (LC/40km) Transceiver | ■ 8330-187 LTSFP-1000BX-20KM Transceiver (WDM 1550) |
| ■ 8330-169 MINI GBIC 1000XD (LC/60km) Transceiver | ■ 8330-180 LTSFP-1000BX-40KM Transceiver (WDM 1310) |
| ■ 8330-167 MINI GBIC 1000ZX (LC/80km) Transceiver | ■ 8330-182 LTSFP-1000BX-40KM Transceiver (WDM 1550) |
| ■ 8330-168 MINI GBIC 1000T (100m) Transceiver | ■ 8330-181 LTSFP-1000BX-60KM Transceiver (WDM 1310) |
| ■ 8330-061 100Base LX 30KM, Single-mode, LC Transceiver | ■ 8330-183 LTSFP-1000BX-60KM Transceiver (WDM 1550) |
| ■ 8330-060 100Base FX 2KM, Multi-mode, LC Transceiver | ■ 8330-184 LTSFP-1000BX-80KM Transceiver (WDM 1490) |
| | ■ 8330-185 LTSFP-1000BX-80KM Transceiver (WDM 1550) |

Lantech Communications Global Inc.
www.lantechcom.tw
info@lantechcom.tw

© 2009 Copyright Lantech Communications Global Inc. all rights reserved.
The revise authority rights of product specifications belong to Lantech Communications Global Inc.
Lantech may make changes to specification and product descriptions at anytime, without notice.